




BETA 1™

ONE OF THE LIGHTEST GLOVES IN THE INDUSTRY FOR MAXIMUM COMFORT

The patented nitrile foam coating efficiently channels excess fluid from the glove's surface and the glove provides good grip in damp, oily or dry conditions.

FEATURES

- › Patented nitrile foam coating enhances protection as well as providing good wet grip by channelling away excess fluid from the glove surface
- › Excellent resistance to abrasion
- › Flexible and comfortable, with excellent dexterity
- › Good grip in damp, oily or dry conditions
- › Solid knit wrist provides a secure fit
- › Tested for harmful substances according to Oeko-Tex® Standard 100
- › Lightweight 18 gauge seamless liner
- › Light thermal protection up to 100°C for a short period



SUITABLE FOR

Typical Industries

- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport
- Utilities

Suitable Applications

- Assembly
- Final Fix
- Goods Handling
- Handling Mildly Abrasive Surfaces
- Light Fabrication
- Supervision

CERTIFICATION



CAT II

EN 388:2016



4121X

EN407:2004



X1XXXX

See overleaf for explanation





BETA 1™

SUITABLE FOR

MATERIALS	LINER:	18 gauge nylon, spandex
	COATING:	Foam nitrile
COLOUR	Red/Black	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING	VEND COMPATIBLE OPTION	
			CODE	PACKAGING
6/XS	SKY500	10 pairs per bag	SKYV500	120 individually bagged pairs per case
7/S	SKY501		SKYV501	
8/M	SKY502	120 pairs per case	SKYV502	
9/L	SKY503		SKYV503	
10/XL	SKY504		SKYV504	
11/XXL	SKY505		SKYV505	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS




MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

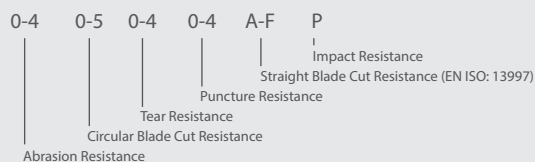

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE EN 407

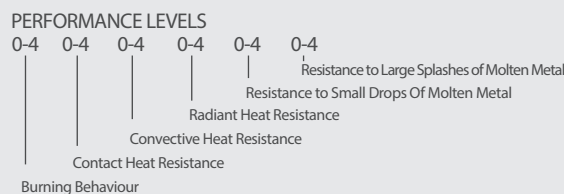

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SKY-DATA-BETA1-0420_1