


Benchmark



TACTILE

A LIGHTWEIGHT GLOVE FOR DELICATE TASKS

A thin and durable glove for precision tasks in dry conditions



FEATURES

- › Dual layer knitted dipped technology ensures an outstanding fit and gives your hand freedom of movement
- › Polyester liner provides stretch and flexibility whilst increasing abrasion resistance
- › Polyurethane palm coating allows precision tasks and resistance to abrasion / tears
- › Excellent dexterity, flexibility and durability
- › Seamless liner prevents irritation
- › Breathable back of hand designed to reduce perspiration



SUITABLE APPLICATIONS

- › Strimming
- › Feeding
- › Planting
- › Seeding
- › Repairing
- › Painting
- › Sowing



CAT I





PRODUCT INFORMATION

MATERIALS	LINER:	Polyester
	COATING:	Polyurethane
COLOUR	Green / Black	
LENGTH (mm)	220-250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE


- **USE:** General handling glove. Not suitable for thermal, electrical or chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	BMG00921ED	10 pairs per bag
8/M	BMG00921EF	120 pairs per case
9/L	BMG00921EH	

BENCHMARK OFFERS GARDENERS BETTER GLOVE CHOICE!

Gloves that are specifically suited for each of their gardening tasks.

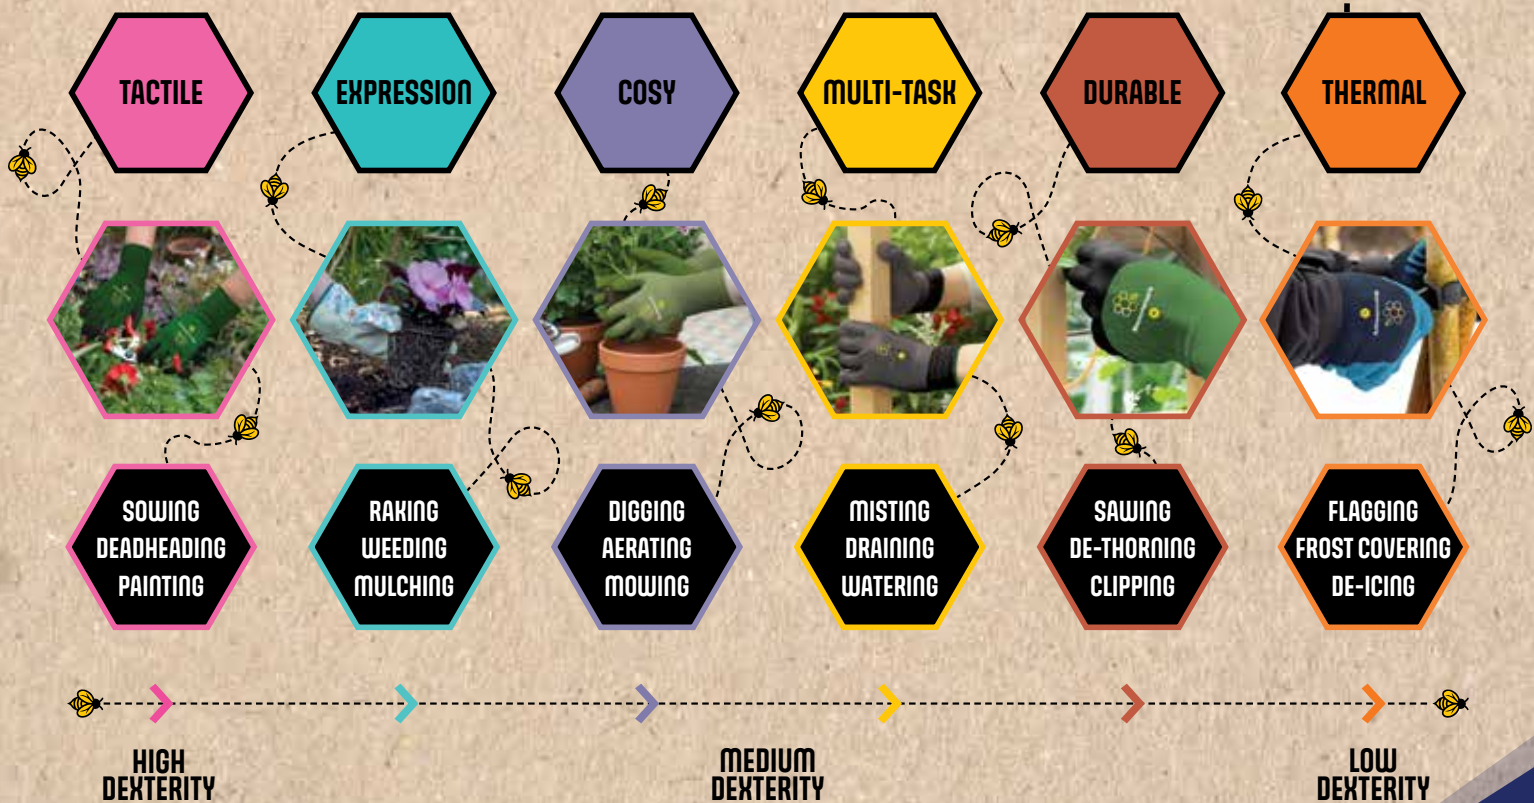

Get in touch: E. sales@globus.co.uk T. +(44) 0161 877 4747

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, United Kingdom

©2020 Globus (Shetland) Ltd | BMK-DATA-TACTILE-0320_1

Part of

Globus
GROUP