


Designed to fit the majority of face shapes, CHRONA™ safety glasses are guaranteed to feel good, not just look good.

Soft, comfortable temple ends and nose bridge further enhance comfort.

## SPECIAL FEATURES

- ✓ Contemporary style
- ✓ Length adjustable temples
- ✓ Inclinable temples
- ✓ Universal soft TPE nose bridge
- ✓ Co-injected temples
- ✓ TPE temple tips give additional grip and comfort
- ✓ Supplied with a microfibre storage pouch
- ✓ Weight: 28g
- ✓ 9.5-Base lens

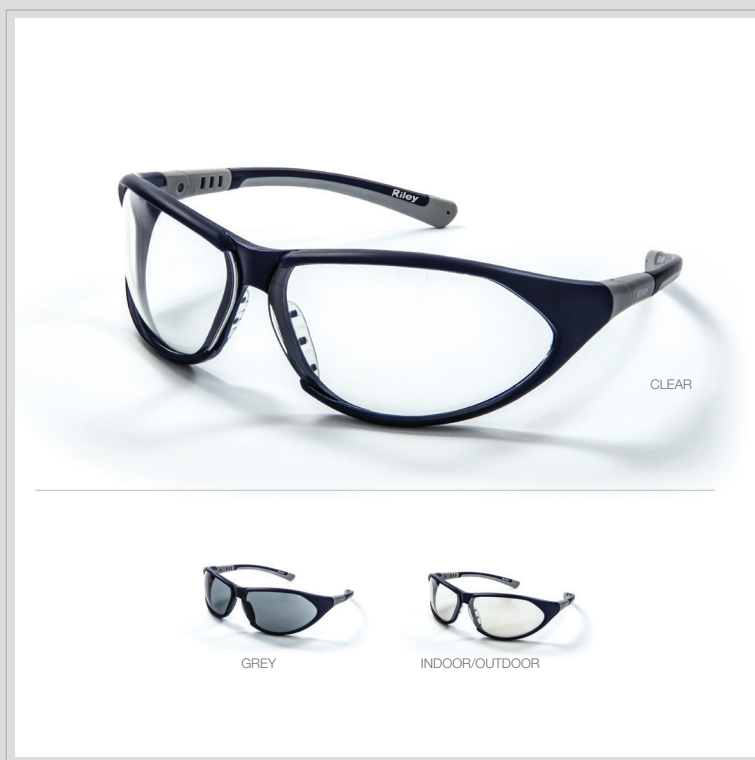

VERSIONS	REF.	LENS MARKING	FRAME MARKING	PROTECTION AGAINST	COATINGS
CLEAR	○ RLY00041	2C-1.2 e 1FKN CE	e EN 166 F CE	Impacts, UV radiations	TECTON 400™ K&N Anti-scratch and Anti-fog / UV400 / Moisture repellent
GREY	● RLY00042	5-2.5 e 1FKN CE	e EN 166 F CE	Impacts, UV and Solar radiations	
INDOOR/OUTDOOR	◐ RLY00043	5-1.7 e 1F CE	e EN 166 F CE	Impacts, UV radiations	Riley Translucent Mirror Coating. Moisture Repellent + Anti-fog on inside

See overleaf for this product's technical specification →

## GENERAL SPECIFICATION

LENS BASE	9.5mm
WEIGHT	28g

## PACKAGING

Individually contained in a polythene bag with a Eurosot

PER BOX	10
PER CARTON	200

## COMPONENT SPECIFICATION

COMPONENT	MATERIAL	FEATURES
LENS	Polycarbonate	Dual lens design
NOSE BRIDGE	Thermoplastic Elastomers (TPE)	Comfortable and flexible
TEMPLE	TR90 Thermoplastic/ Thermoplastic Elastomers (TPE)	Co-injected - Durable, flexible and lightweight
HINGE	Thermoplastic Elastomers (TPE)/Metal	Increased flexibility and strength


## LENS MARKINGS

### LENS FILTER TYPE:

- 2C UV
- 5 Solar

### SCALE NUMBER (SHADE):

- 1.2 Clear or Amber
- 1.7 Minimises or I/O
- 2.5 Grey

 Identity of manufacturer


### OPTICAL CLASS:

- 1 High optical quality


### MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86g ball at 45m/s

### PERFORMANCE:

- K Resistance to scratches by fine particles
- N Resistance to fogging
-  Certification mark

## FRAME MARKINGS

 Identity of manufacturer

**EN 166:** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

### MECHANICAL STRENGTH:

- F Low energy impact, resists a 6mm, 0.86 g ball at 45m/s

 Certification mark

## CLEANING AND STORAGE

**CLEANING:** The lenses should be cleaned regularly.

**MAINTENANCE:** Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

**STORAGE:** All products must be stored in a dry and clean environment.

## PART OF THE GLOBUS GROUP

Based on a substantial heritage of successfully protecting hands, Globus has grown to become one of the world leaders in worker safety, leading the way in technical innovation to provide a range of products that have set the standard for safety, productivity and wearer acceptance.

This focus on creating cutting edge personal protection solutions has now extended to eye and face protection with Riley; a new collection of high performance protective eyewear products engineered with innovation and ingenuity, designed for optimum comfort and styled for safe working.

Riley product approval certificates to CE standards will be provided on request. Riley is a registered trademark.

[www.riley-eyewear.com](http://www.riley-eyewear.com)

E: [info@riley-eyewear.com](mailto:info@riley-eyewear.com)

T: +44 (0)161 877 4747

F: +44(0)161 877 4746

Globus (Shetland) Ltd, 14 Central Park, Mosley Road, Manchester, M17 1NY, UNITED KINGDOM

